

# **Briton**



# 2800 Series

Door controls

The Briton Overhead Concealed Transom Door Closer offers an aesthetically pleasing way to control door openings. The transom closer is suitable for a wide range of both interior and exterior applications including aluminum, timber and hollow metal doors and frames.

In addition to providing years of maintenance free operations, the Briton transom door closer range is easy to specify, order and install with other Allegion hardware.

Functional and practical the transom closer is suited to an array of commercial projects.

### **Features**

- Fully adjustable spring strength to suit door size and site conditions
- Durable cast iron construction ensures product longevity
- Heat treated forged steel piston
- Adjustable closing and latch speed
- Adjustment valves concealed behind transom cover
- Optional 90° and 105° hold open to ease accessibility
- Fits inside standard aluminium head section
- Optional end load arm
- Side load arm standard
- The 10 year warranty provides specifiers and users with assured quality and performance



## Specification guide

	Series	Function	Option
	Briton 2800 SeriesBNT-2800	Non hold open Hold open 90° closer 90 Hold open 105° closer 105	End load
1	1. Series Select the desired series e.g. Briton 2800 Series		
2	Function     Select hold open if required - omit for non hold open		
	3. Option Select the desired option e.g. End load		BNT-2800/90EL

Cover plate not included - specify separately


### Selection chart

Strength	Maximum door width	Maximum door weight
2	850mm	40kg
3	950mm	60kg
4	1100mm	80kg


### Specifications

Door type	Timber or metal
Door size	Maximum width 1100mm
Door thickness	Metal - 37mm minimum Timber - 44mm minimum
Door weight	Maximum 80kg
Applications	Non hold open Hold open 90° Hold open 105°
Maximum angle of opening	130°
Adjustment controls	Closing speed 90°-15° Latching speed 15°-0°
Strength	2-4 adjustable
Options	Cover plate for timber and metal frame
Warranty	10 year mechanical

#### **Bottom view**




### Top view



#### Side view



### **End view**






## 2800 Series mounting details

Side load

Double or single-action aluminium door and frame 16mm top rail

### **End load**

Double or single-action aluminium door and frame 16mm top rail

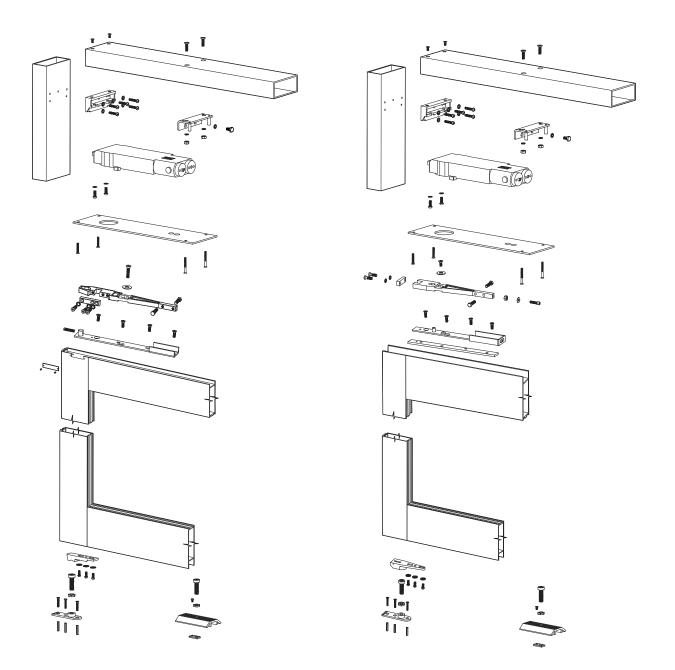

 $Briton\,2800\,Series\,concealed\,transom\,closers\,can\,also\,be\,fitted\,to\,timber\,doors\,and\,hollow\,metal\,doors$ 




### 2800 Series accessories


### Side load arm and DP pivot kit 2800-SLP (standard)

Side load arm to suit 16mm recessed metal top rail. Pivot has adjustable height and capacity up to 80kg door weight. Kit includes components to configure pivot to suit floor mounting or threshold mounting


### Standard floor mounted pivot



### Threshold mounted pivot




### Side load arm



### Wood cover plate 2800W-CP-SE

Aesthetic cover plate for timber applications



### Aluminium cover plate 2800A-CP-SE

Aesthetic cover plate for aluminium applications

