


SYSTEM M+/M MODEL SELECTOR

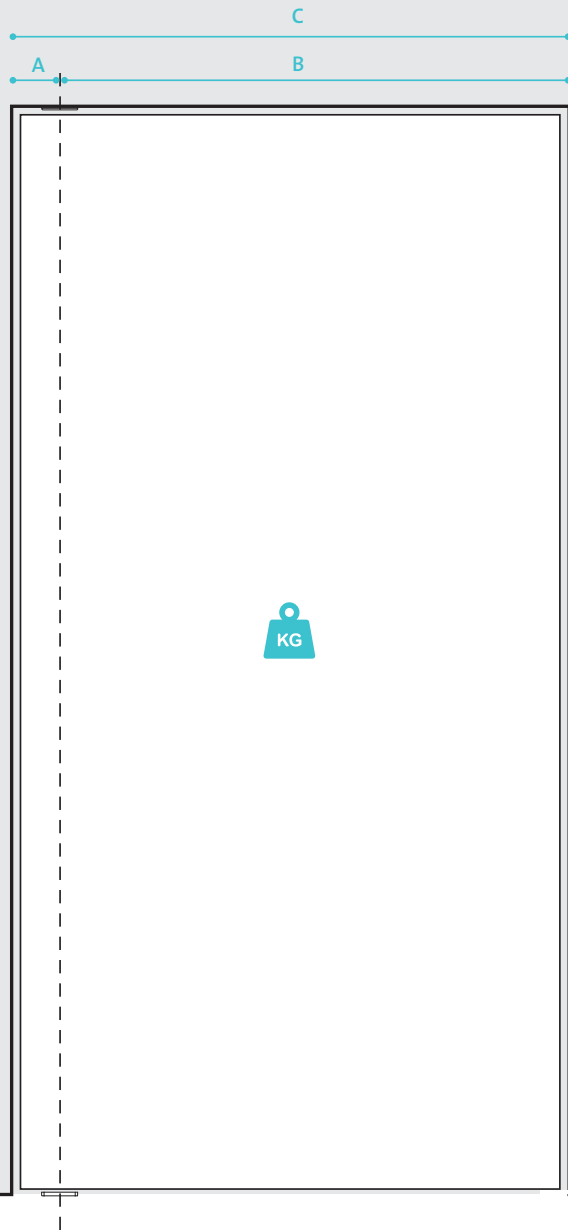

To ensure the pivot hinge provides the appropriate movement for your door, System M+ is available in seven models and System M in four models suited to the weight and width of the door. There are no limits to the height of the door.

System M+ is suitable for pivot doors covering a range between 20 and 500 kg and is suitable for single and double-action doors. When combined with the door frames, the Latch Control ensures the door closes properly.

System M is suitable for pivot doors covering a range between 20 and 210 kg.

EXAMPLE

Use the model selector table on the next page.

Door Specifications: Width 1600 mm, height 3200 mm, weight 165 kg. The distance between the pivot point of the hinge and the side of the door is 91 mm.

1. Determine the distance of pivot point to the latch side of the door:

$$C \text{ minus } A = B: 1509 \text{ mm}$$

2. Check the door width

$$C = 1600 \text{ mm}$$

3. Fill in the weight

$$KG = 165 \text{ kg}$$

The following system suits this door:

M32(+) SCD


Does your pivot door have other measurements than shown here? Please do not hesitate to contact us. FritsJurgens has an on-site testing facility which enables us to determine whether our systems are suitable for your specific situation.

FritsJurgens by Bellevue Architectural NZ | +64 27 617 2880 | info@bellevuearch.co.nz | www.bellevuearch.co.nz



SYSTEM M+ MODEL SELECTOR

Single & Double Action Doors with Stops & Latches

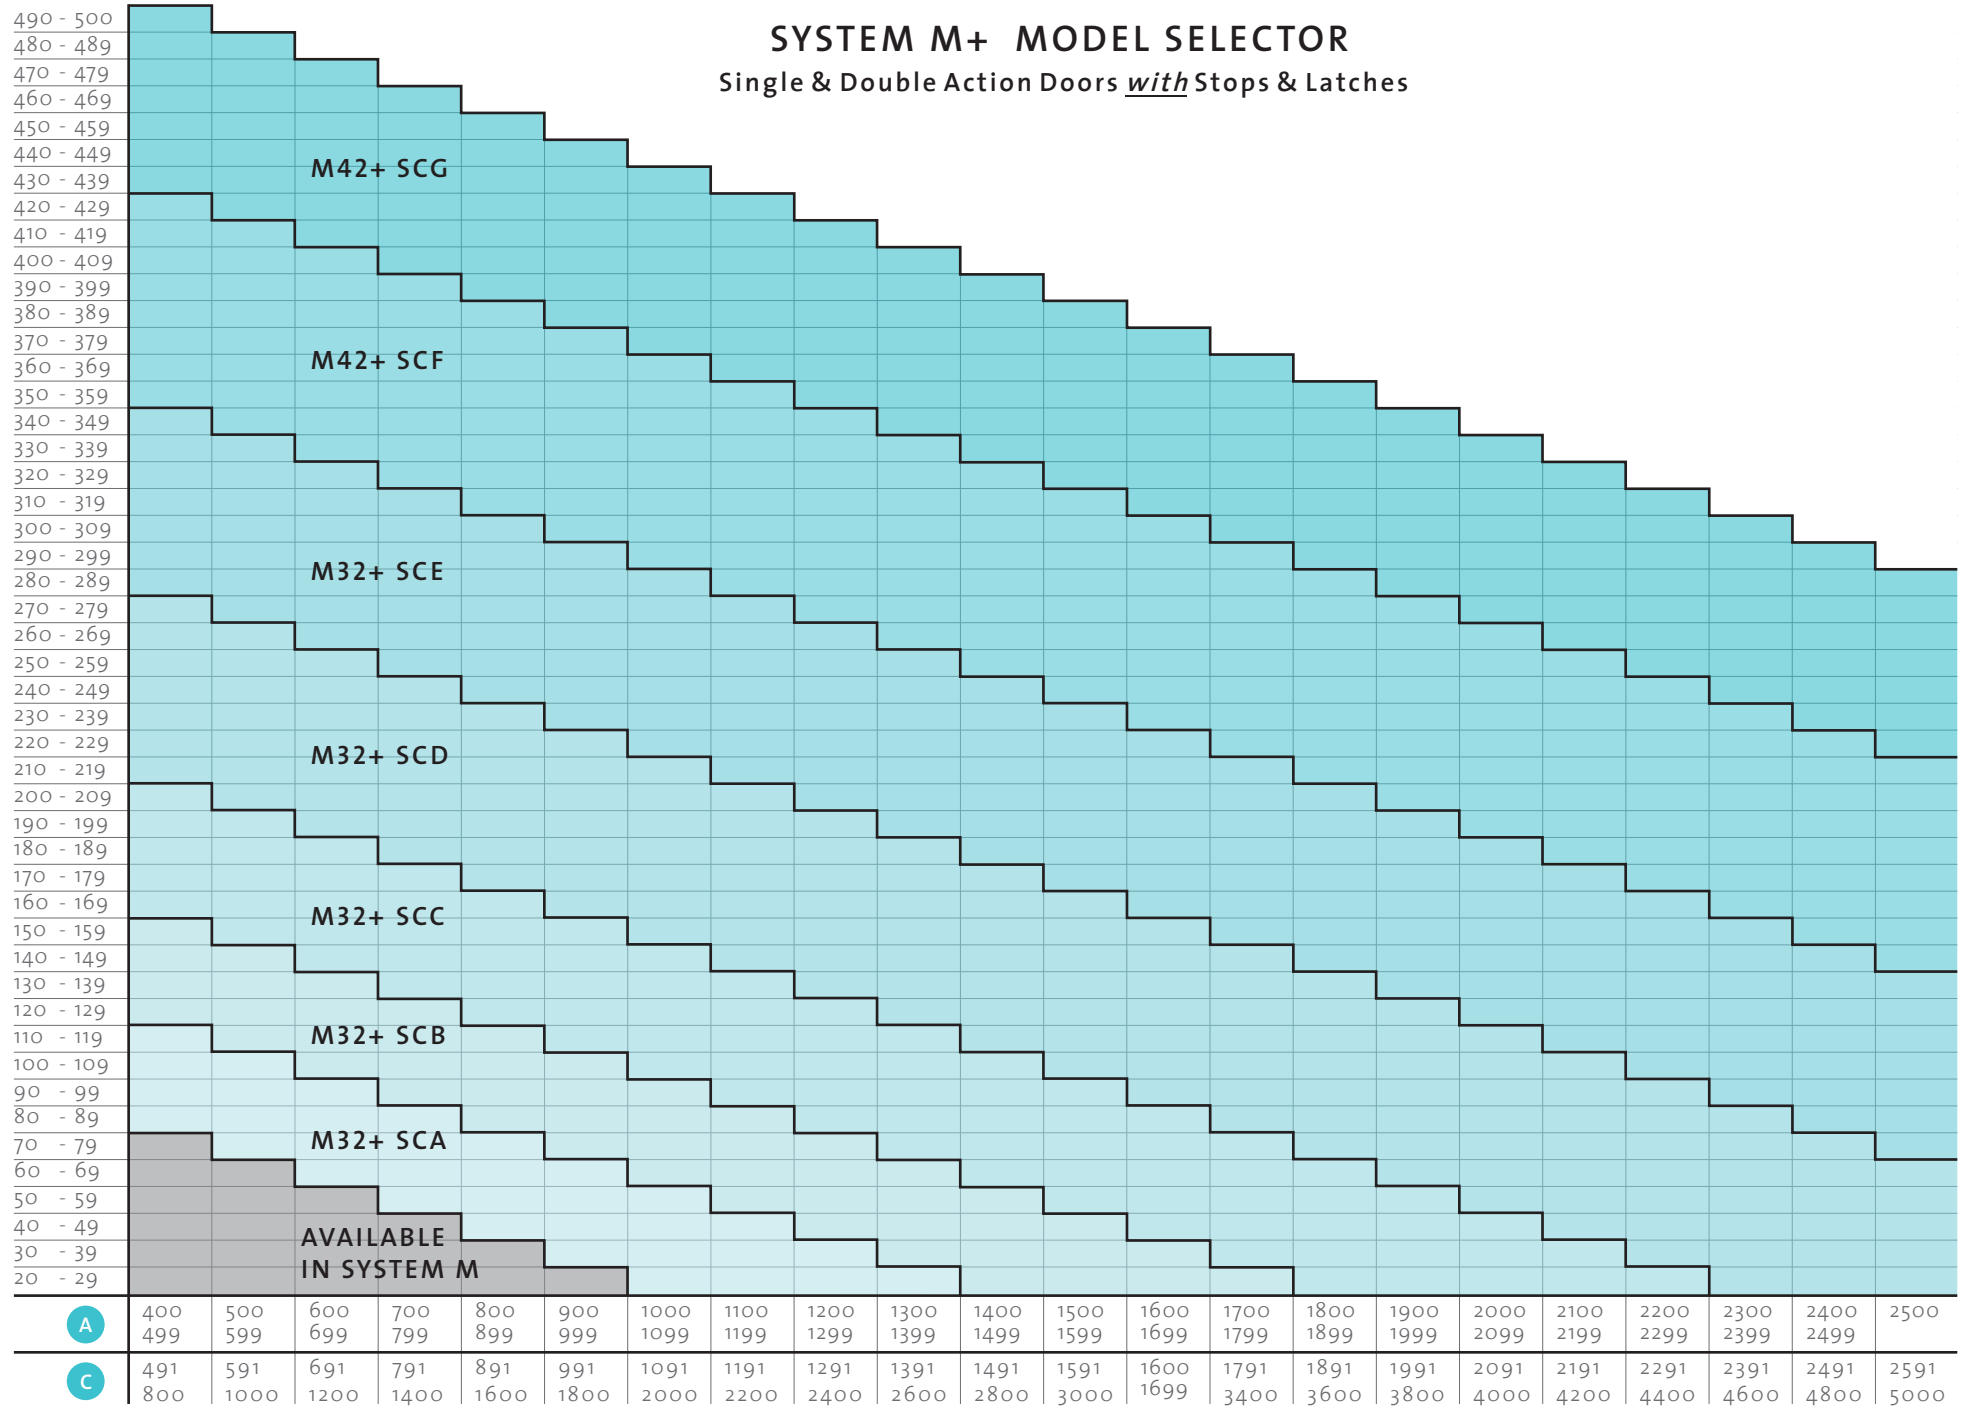



SYSTEM M MODEL SELECTOR

Single & Double Action Doors with No Stops & Latches

