

## RP110Si



The RP110Si is a weather proof threshold plate seal suited to outward opening butt hinged doors. It is ideal for use with a panic type exit device (by others).

For acoustic applications the void under the threshold should be filled with sound foam or other suitable material (by others).

The RP67 drip strip should be considered for above the doorway if there is no eave.

Ideal for use in conjunction with the Raven RP93Si perimeter seal and Raven astragals.

**Location:** Door sill of outward opening doors. (butt hinges recommended).

**Min/Max Gap:** Compression 0mm to 2mm.

**Finish:** Satin clear (silver) anodised aluminium (25µm).

**Fixing:** Screw fix or builders adhesive for concealed fixing (user determined). Zinc plated, cross recess head CSK S.T. screws supplied.

**Seal:** RP393Si. Black silicon rubber (SE).

**Sizes:** Available in stock lengths.

### Approvals

UL Cert. GVV1.R37913

**Acoustic AUS/NZ:** NCC Spec. F5.5.  
**UK/EU:** Approved Document E. Rated to BS EN ISO 717.1.



**Fire & Smoke AUS/NZ:** NCC Spec. C3.4. NZ BC Compliance Doc. C/AS1 6.19.2 & App. C6.1.1.

**FRL & FRR-/240/30.**

Gasket flammability index 1 when tested to AS1530.2.

**BAL** when used with a BAL rated door bottom seal in accordance with AS 3959.

**Energy** NCC Pt. 3.12.3.3 & J3.4.

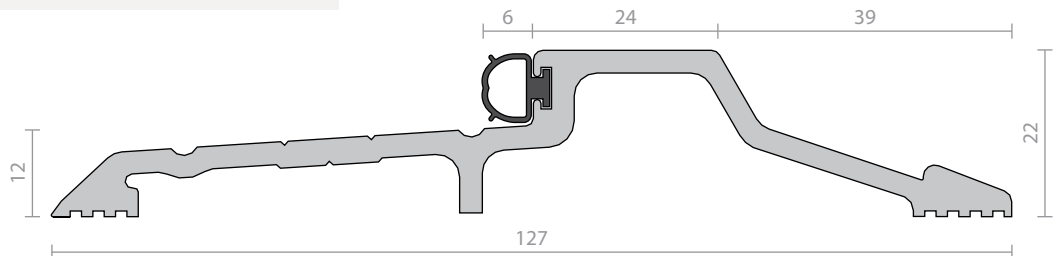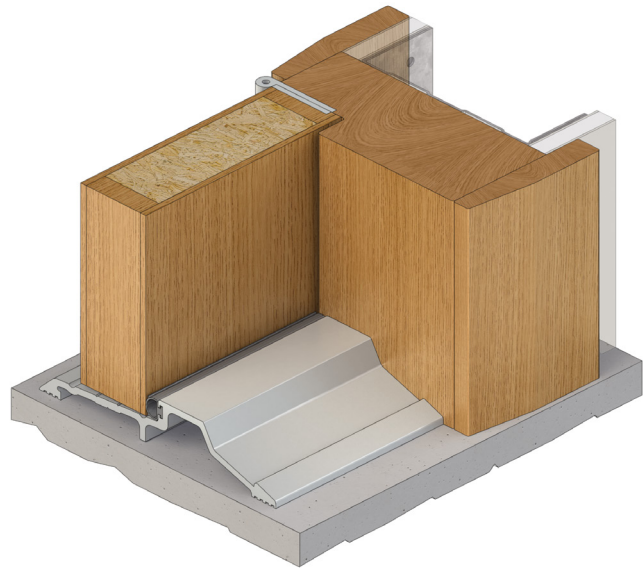

## RP111Si



The RP111Si is a weather proof threshold plate seal suited to outward opening butt hinged doors. It is ideal for use with a panic type exit device (by others).

For acoustic applications the void under the threshold should be filled with sound foam or other suitable material (by others).

The RP67 drip strip should be considered for above the doorway if there is no eave.

Ideal for use in conjunction with the Raven RP93Si perimeter seal and Raven astragals.

**Location:** Door sill of outward opening doors. (butt hinges recommended).

**Min/Max Gap:** Compression 0mm to 2mm.

**Finish:** Satin clear (silver) anodised aluminium (25µm).

**Fixing:** Screw fix or builders adhesive for concealed fixing (user determined). Zinc plated, cross recess head CSK S.T. screws supplied.

**Seal:** RP393Si. Black silicon rubber (SE).

**Sizes:** Available in stock lengths.

### Approvals

UL Cert. GVV1.R37913

ANSI/BHMA A156.22

**Access & Mobility NZ:** NZ BC Compliance Doc. D1/AS1 1.3.2.

**Acoustic AUS/NZ:** NCC Spec. F5.5.  
**UK/EU:** Approved Document E. Rated to BS EN ISO 717.1.


**Fire & Smoke AUS/NZ:** NCC Spec. C3.4. NZ BC Compliance Doc. C/AS1 6.19.2 & App. C6.1.1.

**FRL & FRR-/240/30.**

Gasket flammability index 1 when tested to AS1530.2.

**BAL** when used with a BAL rated door bottom seal in accordance with AS 3959.

**Energy** NCC Pt. 3.12.3.3 & J3.4.

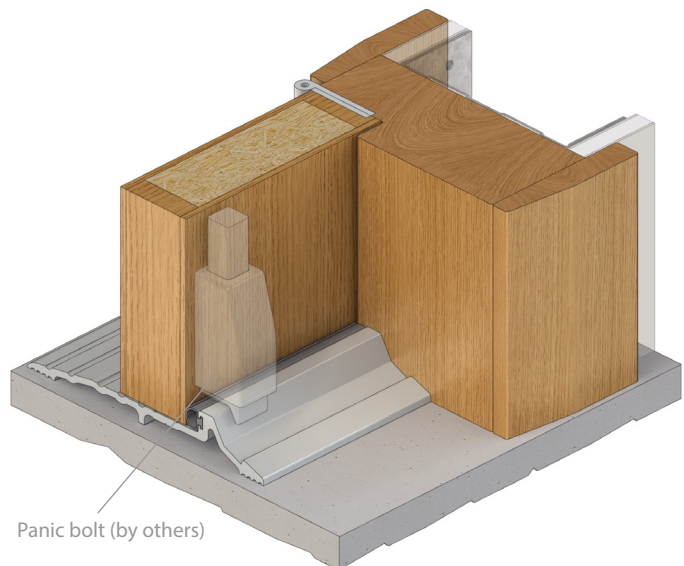

Panic bolt (by others)

