

## RP129Si



A heavy duty medium temperature smoke and weather door bottom seal. The RP129Si can be checked out or drilled to accommodate pivot hardware whilst still providing a continuous seal.

Use in conjunction with RP130Si and a Raven threshold plate (essential).

**Location:** Bottom of double butt hinged or centre pivot double acting doors.

**Min/Max Gap:** 14mm to 18mm.

**Finish:** Satin clear (silver) anodised aluminium (15µm) or paint at extra cost (page 7).

**Fixing:** Screw fix. Zinc plated, cross recess head S.T. screws supplied.

**Seal:** RP3129Si. Light grey silicon rubber (SE).

**Sizes:** Available in stock lengths.

### Approvals



**Fire** Gasket flammability index 1 when tested to AS1530.2.

**Smoke** NCC Spec. C3.4. NZ BC Compliance Doc. C/AS1 6.19.2(b). AS1530.7 & BS EN 1634-3 (similar to BS 476 section 31.1). Meets smoke leakage rates specified in AS6905 & EN 13501-2 "Sa", "Sm".

**Energy** NCC Pt. 3.12.3.3 & J3.4.


**Durability** Tested to over 1,000,000 operating cycles without failure.

**Registered Design.**

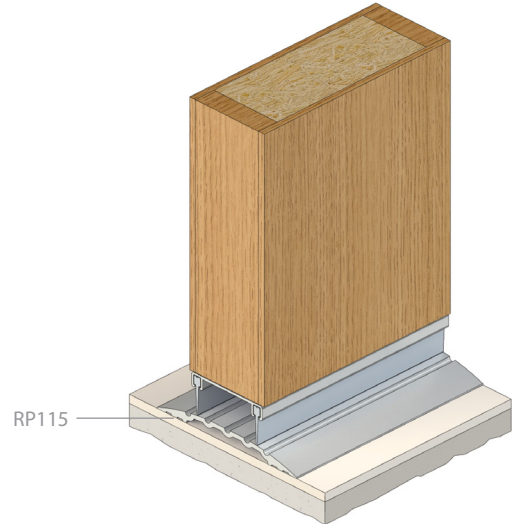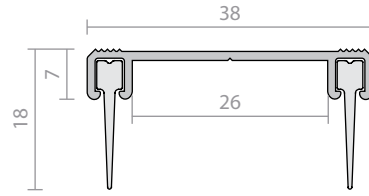


## Brush Strip Seals


### RP2, RP2b (brush only) p.101




### RP2a p.102




### RP2b p.102




### RP15 p.103




### RP41 p.103




### RP49, RP50 p.104




### RP51F p.104




### RP52F p.105



### RP57, RP58 p.105



### RP74 p.106



### RP74F p.106



### RP75 p.107

