

Securitron® MUNL

*Works with Mortise Locksets
without Deadbolts*



The universal compact, high performance, no cut electromechanical motorized strike for use with mortise locksets without deadbolts.

The MUNL is capable of releasing under preload conditions and includes lock monitoring standard. Strong enough to withstand windstorm conditions, the MUNL is the UL listed, fire-rated electric strike that provides ANSI/BHMA Grade 1 holding power and includes field adjustability for latch and deadlatch positions.

Features

Standard Features

- No cutting or altering of the jamb required
- Fits standard ANSI 4-7/8" strike cutout
- Fail secure (Standard)
- Preload capable
- Motorized, no solenoids
- Fully concealed installation
- Maintains dead latch function at all times
- Continuous duty
- Lock Monitor included (SPDT)
- SecuriCare five-year, no fault, no questions asked warranty

Optional Features

- 12 VDC
- 24 VDC
- FSUNL for field selectable fail safe operation
- One model works with most North American Mortise Locks (Sargent 7800 and 8200 require tab kit model #STK-1 for retrofit installations)



Grade 1


SecuriCare
WarrantyMortise Locks
without
Deadbolt

Fire Rated

Windstorm
Resistant

Preload

Dimensions

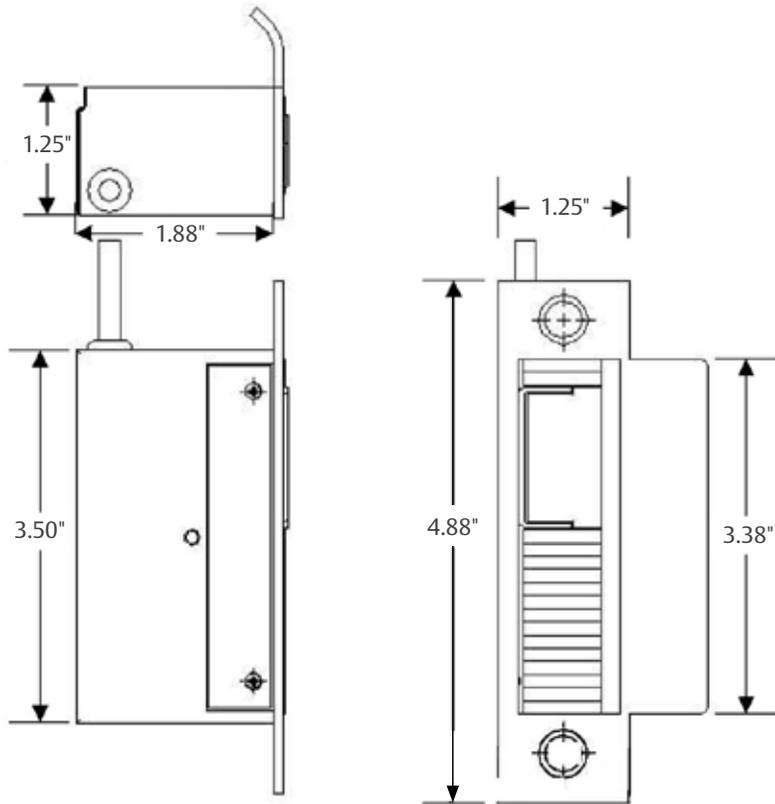

Specifications

Certifications

- UL 10C Listed
- CAN4-S104, CAN/ULC Listed
- NFPA-252 fire door compliant
- UL listed to ANSI/SDI-BHMA A250.13 (60PSI) Windstorm
- ANSI/BHMA A156.31, Grade 1; E09321, E09322, E09323
- ASTM-E152 fire door compliant

Electrical

- 12 VDC (continuous duty)
 - Inrush – 4 Amps
 - Standby Current – 600 mA
- 24 VDC (continuous duty)
 - Inrush – 2 Amps
 - Standby Current – 300 mA

Holding Force

- 1500 lbs [680kg] static

Operating Temperature

- -20 to +125F [-29 to +52C]

Shipping Weight

- 2 lbs [0.91kg]

Securitron® FSUNL Fail Safe Unlatch® Module

Allows Fail Safe
Configuration of
UNL and MUNL



The FSUNL is used with an UNL or MUNL installation to provide selectable fail safe or fail secure behavior. Removal of power initiates a full unlatch or latch cycle depending on which mode is selected.

FSUNL Fail Safe Unlatch Module

Part Number | Description

FSUNL-12	Fail Safe/Fail Secure Unlatch Module, 12 VDC, .90 mA
FSUNL-24	Fail Safe/Fail Secure Unlatch Module, 24 VDC, 1.4 mA

How to Order

Series	Fail Safe / Secure	Voltage	Finish
MUNL	—	- 24	- 10B
MUNL Mortise	(blank) Fail Secure (Standard)	12 12 Volt	(blank) US26D/626—Stainless Steel
		24 24 Volt	10B US10B/613—Oil Rubbed Bronze