

# FCL0002 Cabinet Lock



## Installation Instructions

### Instructions For Lock Mode Change




1. Remove the 2 screws on the bottom.
2. Remove base plate and solenoid.
3. Turn assembly 180° and install into housing.

**WARNING:** Care should be taken to prevent damage to switch lever.

4. Insert the two screws.

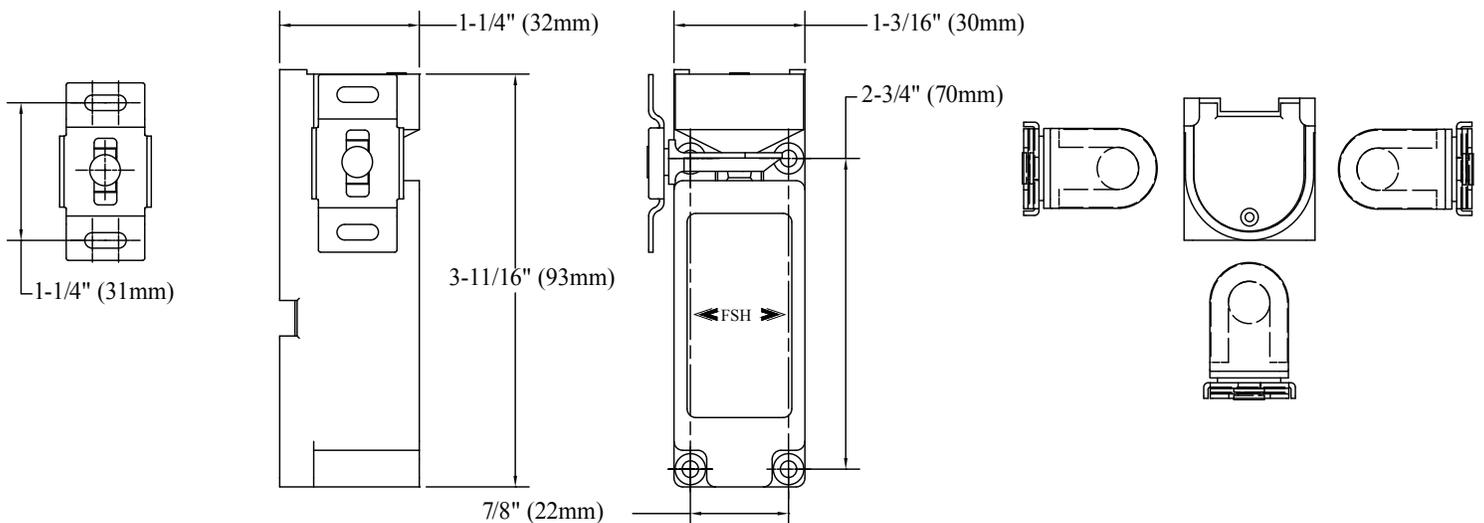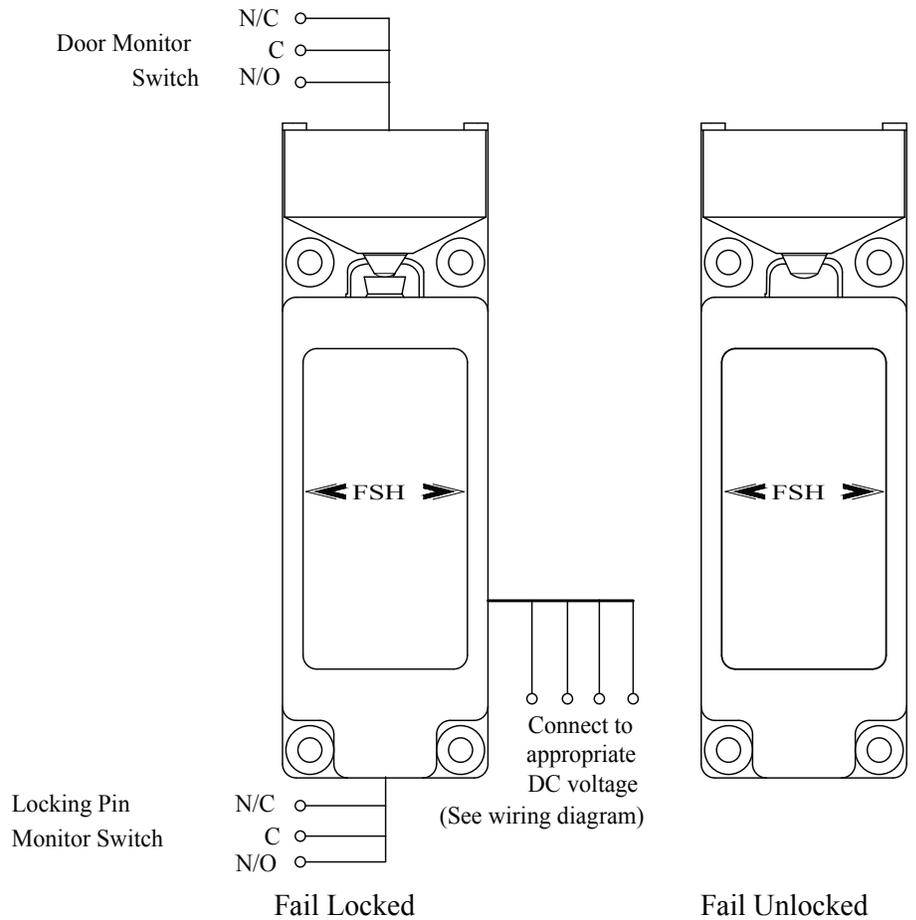


**Installation Dimensions**

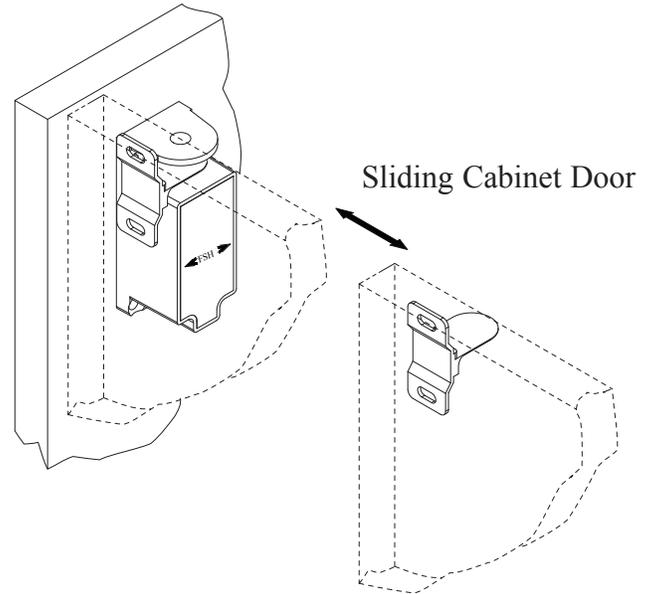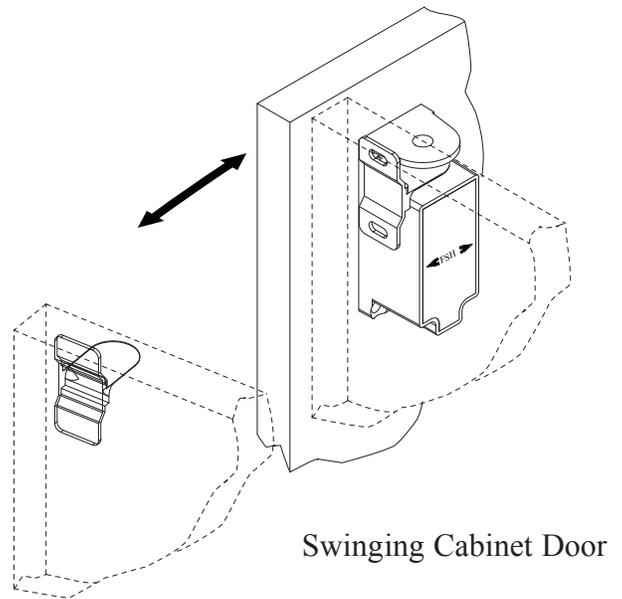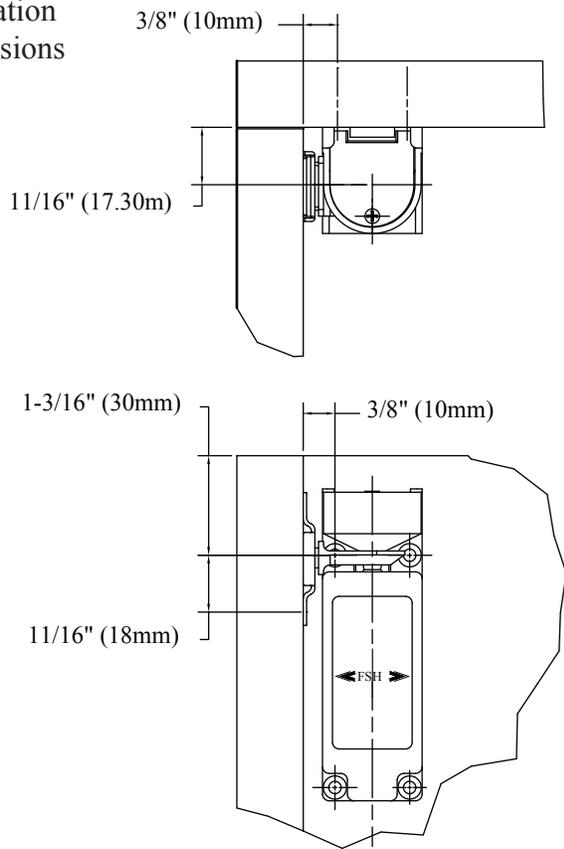


**Parts Checklist**

QTY	Description
4	Flat Head Wood Screws
2	Pan Head Wood Screws


**1. Locking Pin Monitor Switch Wiring Diagram**  
125VAC; 1A / 30VDC; 0.5A

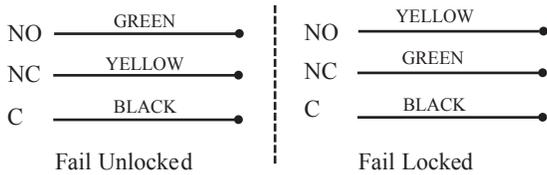

**2. Door Monitor Switch Wiring Diagram**  
125VAC; 3A / 30VDC; 2A



**3. Cabinet Lock Dual Voltage Wiring Diagram**  
12VDC (200mA)

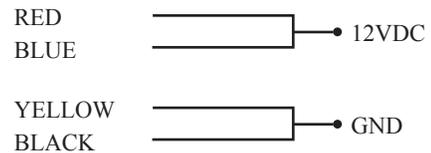

**4. Cabinet Lock Dual Voltage Wiring Diagram**  
24VDC (100mA)

